


## WELDING RECTIFIER CORES

### PART#: R-100-60-20

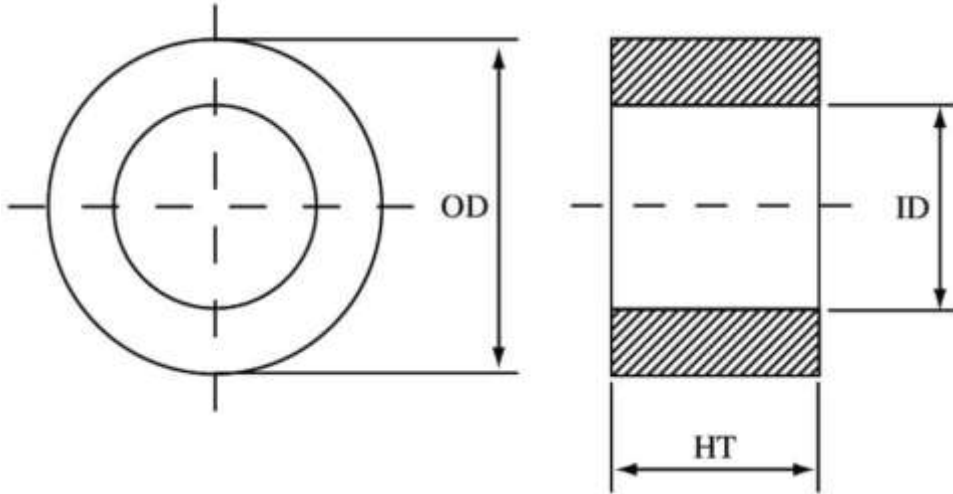

### CORE AND CASE DIMENSIONS:

NO. OF LEGS	CORE OD MM	CORE ID MM	CORE HT MM	INSTALLATION DIMENSION MM	ASSEMBLY APERTURE MM	PITCH OF THE ASSEMBLY MM
2	100.00	60.00	20.00	105.00 X 123.00	5.00	90.00

### CORE SPECIFICATIONS:

- Outer Diameter D: 100mm (+0.5/-0)mm
- Inner Diameter d: 60mm (-0.5/+0)mm
- Height h: 20mm (+0.2/-0)mm
- Density: 7.20 gms/cm<sup>3</sup>
- Cross-Sectional Area Ae: 3.00cm<sup>2</sup>
- Mean Magnetic Path Length le: 25.12cm
- Stacking Factor: 75%
- Average Core Weight: 540grams
- Operating Temperature: -25°C~+110°C
- Max Core Loss @20kHz, 0.5T: 25Watts/Kg
- Max Remenance @20kHz, 0.5T: 0.280Tesla
- Als(μH)> 35μH (@20KHZ/1.0V/SER MODE)

